

PA 1143564

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

IB/SS/50303

March 11, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/539,781

FILING DATE: January 27, 2004

REC'D 28 JAN 2005

WIPO

PCT

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



P. SWAIN

Certifying Officer

Please type a plus sign (+) inside this box

PTO/SB/16 (02-01)
Approved for use through 10/31/2002. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EV312069437US Date of Mailing: JANUARY 27, 2004

INVENTOR(S)

Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)
TOM	BURGMANS	Eindhoven, The Netherlands

☐ Additional inventors are being named on the _____ separately numbered sheets attached hereto

TITLE OF THE INVENTION (280 characters max)

METHOD AND APPARATUS FOR SIMULATING TASTE SENSATIONS IN A TASTE SIMULATION SYSTEM

CORRESPONDENCE ADDRESS

Direct all correspondence to:

☒ Customer Number

24737

24737

OR

Type Customer Number here

☐ Firm or Individual Name PHILIPS ELECTRONICS NORTH AMERICA CORPORATION

Address PO BOX 3001

Address

City	BRIARCLIFF MANOR	State	NY	ZIP	10510
Country	USA	Telephone	914-945-6000	Fax	914-332-0815

ENCLOSED APPLICATION PARTS (check all that apply)

☒ Specification Number of Pages

15

☐ CD(s), Number

☒ Drawing(s) Number of Sheets

5

☐ Other (specify)

☐ Application Data Sheet. See 37 CFR 1.76

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)

☐ Applicant claims small entity status. See 37 CFR 1.27.

☐ A check or money order is enclosed to cover the filing fees

FILING FEE
AMOUNT (\$)

☒ The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 14-1270

160.00

☐ Payment by credit card. Form PTO-2038 is attached.

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____

Respectfully submitted,

SIGNATURE

Date January 27, 2004

REGISTRATION NO.: 39,703
(if appropriate)

TYPED or PRINTED NAME Dcraan Halajian

Docket Number: US040084

TELEPHONE (914) 333-9607

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Box 1450, Alexandria, VA 22313-1450

**METHOD AND APPARATUS FOR SIMULATING TASTE SENSATIONS IN A
TASTE SIMULATION SYSTEM**

5 This invention relates generally to sensory stimulation, and more particularly, to the production of taste sensations on a human tongue using electronic stimuli.

 To the best of the inventor's knowledge, there are no known prior art patents that are directed to electronically stimulating the tongue palate to simulate various taste sensations. Other measurements have been performed including receiving signals from the tongue.

10 U.S. Pat. No. 5,212,476 issued to Sean R. Maloney describes an intra-oral device for detecting electromyographic (EMG) signals from the tongue. The Maloney device describes a single splint having a convex side which may be in contact with either the maxillary or mandibular and includes active electrodes mounted on the splint adjacent to the tongue. Muscle contraction causes the movement of charged ions across membrane
15 and myoneural junctions thereby establishing electric fields of varying intensities depending on the degree of muscle contraction. These electric fields, i.e., (EMG) signals, may be detected by electrodes which commonly are placed on the skin or inserted into the muscle tissue in the form of a needle. These signals provide useful information to the physician with respect to the neuromuscular condition.

20 The present invention provides a tongue plate device that enables a user (wearer of the device) to receive electronic stimulation in various regions of the user's tongue to simulate the different taste sensations (i.e., sweet, sour, salty, bitter), that are conventionally stimulated via chemical means. The tongue plate device includes means for measuring the saliva response of the user to determine the user's preference or lack
25 thereof for the various taste sensations being simulated. The tongue plate device is sized to fit over a human tongue and includes a lower surface configured to lie on top of a human tongue, the lower surface including a plurality of electronic stimulation nodes operable to transmit externally generated electrical signals to stimulate sensory nerve fibers within the human tongue at predetermined locations; and an upper surface
30 including saliva flow measurement means for measuring a rate of change in the saliva flow rate of a human in response to the stimulation of the sensory nerve fibers.

Systems according to the present invention generally include a tongue plate apparatus having a plurality of stimulation nodes, each node coupled, via wired or wireless means, to an interactive device configured to receive tongue plate data from a content provider, process the tongue plate data and provide the processed tongue plate data to the tongue plate to excite the plurality of stimulation nodes. The tongue plate apparatus also includes saliva flow rate measuring means for measuring the saliva flow rate of a user in response to the applied electronic taste stimulation signals. The interactive device is also configured to receive feedback data from the saliva flow rate measuring means of the tongue plate. The feedback data is capable of being stored and analyzed to determine a user's taste preferences.

Referring now to the drawings in which like reference numbers represent corresponding parts throughout, where:

FIG. 1 is a simplified illustration of a cross-sectional view of a human tongue;

FIG. 2 is a perspective view of a taste sensation system according to an embodiment of the invention;

FIGS. 3a and 3b are enlarged views of the stimulation nodes of FIG. 2, according to various embodiments of the invention;

FIG. 4a-c are illustrations of the saliva flow measuring system of FIG. 2; and

FIG. 5 is of a method a flowchart according to one embodiment of the present invention.

In the following description of the specific embodiments, reference is made to the accompanying drawings which form a part hereof and which show by way of illustration the specific embodiments in which the invention may be practiced. In the accompanying drawings, like reference numbers represent corresponding parts throughout the several views. It is to be understood that other embodiments may be utilized as structural changes may be made without departing from the scope of the invention.

It is instructive to first briefly review some of the functionality and structure of the human tongue. Humans perceive all taste qualities all over the tongue. There may be increased sensitivity to certain qualities in certain areas. In addition, our taste system provides information on the intensity and pleasantness (or unpleasantness) of taste as well. The tongue is made up of muscles covered by mucous membranes. There are very

small nodules, called papillae, from the top surface of the tongue, which give it its rough texture. Between the papillae at the sides and base of the tongue are small, bulblike structures that are sensory organs, called "taste buds," which enable us to enjoy the sensations of flavor and warn us when food is unfit to eat. The so-called "taste-buds" number somewhere between 5,000 to 10,000, scattered over the upper and side surfaces of the tongue. The taste buds are capable of chemically detecting each of the various taste sensations, however, each taste bud is more acutely attuned to a particular taste sensation.

FIG. 1 is a simplified illustration of a cross-sectional view of a tongue 100 including taste buds 102, located in the upper surface of the tongue 100. Each taste bud 102 in the tongue 100 is coupled to the nervous system via the sensory nerve fibers 104. A key feature of the invention is the recognition by the inventor that producing taste sensations on the tongue 100 via conventional chemical means may be by-passed by the present invention in favor of direct electronic stimulation of the sensory nerve fibers 104 which couple the taste buds 102 of the tongue 100 to the nervous system (not shown).

Referring now to FIG. 2, an exemplary taste simulation system 200 for simulating the different taste sensations (i.e., sweet, sour, salty, bitter) in a human mouth will now be described in detail. As shown, taste simulation system 200 includes a tongue plate 10 connected to an interactive device 50 which is in turn connected to a content provider 80 via a broadcast network 110. The interactive device 50 is directly coupled to an external multimedia device 60.

The tongue plate 10 of FIG. 2 generally follows the contours of the wearer's tongue 100 and is configured to include a left and right shoulder 12, 15 that extend along the sides of the tongue. These shoulders 12, 15 serve to position the tongue plate 10 on and around the tongue and to prevent lateral slippage. The tongue plate 10 may be formed, if desired, with rounded edges and surfaces to prevent injury to the soft tissue of the tongue. The tongue plate 10 may be formed from one or more materials selected for their low cost and/or disposability. In addition, the tongue plate 10 may be pre-sterilized and packaged.

Embedded within the tongue plate 10 are a plurality of electronic stimulation nodes (13(1), 13(2), ..., 13(N)) positioned at various points on the tongue plate 10

groups 20a, 20b. Each pole group 20a, 20b is electrically isolated from the other pole groups. Further, each pole group 20a, 20b is independently coupled to separate channels of the interactive device (50) via cabling (i.e., pole group 20a coupled via pole group lead wire 14(1) and pole group 20b coupled via a pole group lead wire 14(2)).

5 With reference first to the embodiment of FIG. 3a, each pole group 20a, 20b is shown to be respectively comprised of three stimulation nodes 22a-c, 24a-c. It should be appreciated that different embodiments may include more or less stimulation nodes 22, 24 per pole group. Each stimulation node 22, 24 in FIG. 3 is configured to include a negative (-) inner region encapsulated by an outer positive (+) region for forming a
10 complete circuit. Other embodiments may invert the node configuration. That is, the stimulation node 22, 24 may be otherwise configured as having a positive (+) inner region encapsulated by a negative (-) outer region.

Each stimulation node 22, 24 in the pole group is capable of transmitting an electric stimulation signal (e.g., current and/or voltage) to electronically stimulate one or
15 more sensory nerve fibers 104 in the immediate vicinity of the tongue 100 over which the stimulation nodes 22, 24 of each pole group is situated (see Figure 1). Each pole group 20a, 20b receives a unique and separate electronic stimulation signal from the interactive device 50 via a corresponding pole group lead wire 14(1), 14(2).

FIG. 3b is an illustration of a stimulation node 13 according to another
20 embodiment of the invention. As shown, the stimulation node 13 is comprised of four pole groups, i.e., 20(a) -20(d). Additional pole groups (e.g., 20(c), 20(d)) may provide heightened sensitivity in certain areas of the tongue 100 where it is desired. Of course, it will be recognized that the number and configuration of pole groups are a design matter. For example, it is contemplated that in certain embodiments, pole groups 20 may
25 intersect and/or overlap at certain points.

It is to be appreciated that the tongue plate 10 may also communicate with the interactive device 50 in a wireless manner. Thus, the tongue plate 10 may include a suitable wireless interface. The advantage of a wireless communications link is that it obviates the need for the wire leads 14 which may become entangled, dislodged or
30 disconnected. Due to the fact that the tongue plate 10 communicates in a wireless

manner, it will be appreciated that the tongue plate 10 carries its own power supply (not shown) which may be a battery-operated power supply.

FIG. 4a is an illustration of a top view of the saliva flow measuring system 55 of the tongue plate 10 of FIG. 2 for measuring the saliva flow of a user in response to electronic stimulation of the tongue plate 10. As shown, the saliva flow measuring system 55 is located in a rear top portion of the tongue plate 10. It should be appreciated that each user's saliva response to the electronic stimulation signals will differ from other user's saliva response so that the taste response (i.e., saliva flow rate) for that user is unique to the user.

FIG. 4b is a more detailed illustration of the saliva flow measuring system 55, according to one embodiment of the invention. The saliva flow rate may be measured in one way by a set of parallel tube-like structures, referred to herein as pipes 55(1), 55(2), ..., 55(N) located parallel to the longitudinal axis of the tongue plate 10 through which saliva passes en route to the gullet. The pipes 55 have openings on both the proximal and distal ends for receiving a user's saliva and directing the saliva flow past the tongue palate en route to the user's gullet.

FIG. 4c is an internal view of one of the pipes 55(1) of FIG. 4b coupled via pole group lead wire 14(1) to an exemplary taste simulation system 200. The pipe 55(1) is shown to include a pair of hinged gates 65a, 65b, i.e., i.e., a left hinged gate 65a and a right hinged gate 65b, serve to modulate the saliva flow as it passes through the pipe 55(1). The two gates, 65a, 65b, (shown in both the open and closed positions) are pivotable about respective gate axes 70, 71. Those of ordinary skill in the art will recognize that a variety of other one-way gate type devices could also be used in place of the hinged gate pair 65a, 65b shown in the exemplary embodiment.

An output signal generated by the saliva flow measuring system 55 may be fed back to the content provider 80, via the interactive device 50, to measure the user's preference or lack thereof for the electronically stimulated taste sensation. The output signal could also be stored in a memory 52 associated with the interactive device 50.

The interactive device 50 includes at a minimum, hardware and/or software means for translating tongue plate information provided by the content source 80 into electrical signals suitable for use with the tongue plate 10. The interactive device 50

In the case where the content provider 80 is embodied as a television broadcast station, and the broadcast signal is a digital broadcast signal, the stimulation signals could be delivered from the content provider 80 to the interactive device 50 inside xlet packages which may be transmitted along with the conventional broadcast service. As is well known in the art, an xlet is a procedural application which a digital television (DTV) extension of an applet. An x-let is an interactive program that can be executed while watching/listening to the video/audio portions of the broadcast.

In the case where the content provider 80 is embodied as a television broadcast station, and the broadcast signal is an analogue broadcast signal, the stimulation signals could be delivered from the content source to the interactive device 50 in an inaudible portion of the audio spectrum, preferably outside the 20Hz – 20KHz range, so as not to interfere with the audible portion of the broadcast. Alternatively, the stimulation signals could be delivered from the content source to the interactive device 50 in an un-displayed portion of the video spectrum or via a teletext page.

In the case where the content provider 80 is embodied as a source other than a television broadcast station, such as, for example, an Internet site that transmits content in a unicast, multicast, or broadcast fashion, a digital versatile disk player (DVD), a video cassette recorder (VCR) and other similar sources of content, the stimulation signals could be delivered to the interactive device 50 via a suitable interface to the tongue plate 10.

It is also possible to have a separate telephone connection via an embedded modem, which can also be used as a return channel, for example, through an always-on return channel, such as a DOCSIS modem.

FIG. 5 is a flowchart of one embodiment of the present invention of a method 500 for providing sensory stimulation to a user's tongue in the context of an interactive broadcast directed to the preparation of various food items. Interactive broadcasts are well known, however, the invention provides a novel variation of an interactive broadcast in that the tongue plate 10 of the invention provides an interactive sensory stimulus of the food items being prepared during the broadcast. In the acts to be described, it is presumed that a user is tuned to a broadcast channel showing an interactive cooking program in which various dishes are prepared by a host, in a particular cooking style.

At Act 501: the process starts when either a user's external multimedia device 60 which for illustrative purposes is embodied as a television receiver including an integrated set-top box, is tuned to a channel displaying a cooking program. The cooking program typically includes the preparation of at least one recipe.

5 At Act 503: a user switches on the interactive device 50 coupled to the tongue plate 10.

10 At Act 505: The user attempts to log in to the interactive device 50 by entering his(her) username and password, which have previously been provided to the user, in appropriate data fields and clicking on a "Log In" icon. For a new user, the interactive device 50 solicits various information from the user and a username and password are provided once the user has provided this information. Alternatively, the user information may be pre-stored in a memory 52 associated with the interactive device 50, enabling the user to enter directly into the system with a single sign-on and eliminating the need for the user to log in each time the system 200 is accessed.

15 At Act 507: Once the user has successfully logged into the system, user preferences, such as preferred taste preferences, are loaded from a memory coupled to, or integrated within, the interactive device 50 based on a user identification set for that user.

At Act 509: The user inserts the tongue plate 10 into the user's mouth.

20 At Act 511: As the food items are being prepared on the cooking program, control signals (tongue plate data) are transmitted along with conventional audio/video information from a broadcast station 80 to the interactive device 50.

25 At Act 513: The interactive device 50 processes the control information to generate appropriate electronic stimulation signals for stimulating appropriate stimulation nodes 13 on the tongue plate 10 associated with the food item being prepared. The stimulating signals are coordinated with the visual/audio signals being delivered to the television set 25.

At Act 515: The saliva flow rate is measured in response to the stimulation signals and appropriate feedback signals are generated corresponding to the measured saliva flow rate and stored in the memory 52 of the interactive device 50.

At Act 517: The feedback information is transmitted back to the broadcast station 80 via a return channel. In alternate embodiments, the feedback information can be used in a variety of ways, including, but not limited to:

- market information for food companies.
- 5 • Provide the host of the cooking program with an indication of preferred items, thus allowing the host to continue cooking with the preferred items.
- stored inside the interactive device 50 in a directory identifying the user, e.g., "good tasting flavors for user X".
- The feedback information could be used as input for other applications
- 10 such as games, other x-lets or even for application running on other devices (e.g. computer) then the said interactive device.

At Act 519: The user removes the tongue plate 10 to be washed and dried.

At Act 521: The user logs off from the interactive device 50 and switches off the
15 interactive device.

Although this invention has been described with reference to particular embodiments, it will be appreciated that many variations will be resorted to without departing from the spirit and scope of this invention as set forth in the appended claims. The specification and drawings are accordingly to be regarded in an illustrative manner
20 and are not intended to limit the scope of the appended claims.

In interpreting the appended claims, it should be understood that:

- a) the word "comprising" does not exclude the presence of other elements or acts than those listed in a given claim;
- b) the word "a" or "an" preceding an element does not exclude the presence of a
25 plurality of such elements;
- c) any reference signs in the claims do not limit their scope;
- d) several "means" may be represented by the same item or hardware or software implemented structure or function; and
- e) each of the disclosed elements may be comprised of hardware portions (e.g.,
30 discrete electronic circuitry), software portions (e.g., computer programming), or any combination thereof.

CLAIMS:

1. A tongue plate (10) apparatus sized to fit over a human tongue (100), the
5 tongue plate (10) including:
a lower surface including a plurality of electronic stimulation nodes (13)
operable to transmit externally generated electrical signals to stimulate sensory nerve
fibers (102) within the human tongue (100) at predetermined locations; and
an upper surface including saliva flow measurement means (55) for
10 measuring a rate of change in the saliva flow rate of a human in response to the
stimulation of the sensory nerve fibers (102).
2. The tongue plate (10) of Claim 1, wherein said tongue plate (10) further
includes a left and right shoulder (12, 14) extending along the sides of the human's
15 tongue, said left and right shoulders (12, 14) serving to prevent lateral slippage and
generally follow the contours of the human's tongue.
3. The tongue plate (10) of Claim 1, wherein the tongue plate (1) is formed
with rounded edges and surfaces to prevent injury to the soft tissue of the human's
20 tongue.
4. The tongue plate (10) of Claim 1, wherein said electrical signals are one of
AC signals, DC signals and a combination of AC and DC signals.
5. The tongue plate of Claim 1, wherein said saliva flow measurement means
25 (55) is a plurality of parallel pipes (55(1) – 55(N)) positioned in a rear portion of said
upper surface of said tongue plate (10) and extend horizontally along a line parallel to a
longitudinal axis of said tongue plate (10) such that at least a portion of a saliva flow
produced in response to said electrical stimulation flows through said parallel pipes
30 (55(1) – 55(N)).

6. The tongue plate (10) of Claim 5, wherein an interior region of each of said parallel pipes (55(1)-55(N)) includes a left hinged gate (65a) and a right hinged gate (65b), working cooperatively and wherein each gate 65a, 65b is pivotable about respective left and right gate axes (70, 71) allowing said gates 65a, 65b to rotate from a first closed position to a second outwardly extending position.

7. The tongue plate (10) of Claim 1, wherein each of the plurality of stimulation nodes (13) are arranged in pole groups (20), wherein each pole group (20) includes one or more stimulation nodes (22, 24).

8. The tongue plate (10) of Claim 1, wherein each stimulation node (22, 24) is comprised of a negative inner region encapsulated by an outer positive region for conducting said electrical stimulation.

9. The tongue plate (10) of Claim 1, wherein each stimulation node (22) is comprised of a positive inner region encapsulated by an outer negative region for conducting said electrical stimulation.

10. A system for electronically simulating taste sensations in a user's tongue, the system comprising:
a content provider (80) operable to generate tongue plate data;
an interactive device (50) in communication with the content provider (80) and configured to receive the tongue plate data therefrom, convert the tongue plate data into electronic stimulation signals and output the electronic stimulation signals to a tongue plate (10); and
the tongue plate (10) configured to receive the electronic stimulation signals from the interactive device (50) and apply the electronic stimulation signals to stimulate sensory nerve fibers (102) within the tongue (100) of a human via a plurality of stimulation nodes (13) embedded within said tongue plate (10).

11. The system of Claim 10, wherein the content provider (80) includes a content server (82), said tongue plate data and stored/retrieved content (84) such as movies, television programs, commercials, music, and similar audio and/or video content, wherein said tongue plate data is synchronously supplied along with said stored/retrieved content (84) to said interactive device (50).

12. The system of Claim 10, wherein said interactive device (50) includes an output connector for connecting electrode lead-wires to specific ones of the plurality of stimulation nodes (13) included in said tongue plate (10).

13. The system of Claim 10, wherein said interactive device (50) is wirelessly coupled to said tongue plate (10).

14. The system of Claim 10, wherein said interactive device (50) further comprises memory means (52).

15. The system of Claim 10, wherein the tongue plate (10) further includes saliva flow rate measuring means (55) for measuring the saliva flow rate of a human.

16. The system of Claim 10, wherein the plurality of stimulation nodes (13) are arranged in pole groups (20) and each pole group (20) is comprised of one or more stimulation nodes (22, 24).

17. The system of Claim 10, wherein each pole group (20) is independently coupled to a separate channel of the interactive device (50).

18. A method for simulating taste sensations, comprising:
a) positioning a tongue plate (10) onto a tongue (100) of a user;
b) receiving, from an external source, a plurality of electronic stimulation signals at said tongue plate (10);

c) applying the received electronic stimulation signals to a plurality of stimulation nodes (13) disposed within said tongue plate (10) to electronically stimulate sensory nerve fibers (104) in said user's tongue (100); and

5 d) measuring a saliva flow rate of said user in response to said applied electronic stimulation signals.

19. The method of Claim 18, wherein said plurality of stimulation nodes (13) are configured to contact predetermined locations of an upper surface of the user's tongue (100).

10

20. The method of Claim 18, wherein the receiving act (b) further comprises the acts of:

transmitting, from a content provider (80), multimedia data including tongue plate data over a network (110) to an interactive device (50);

15

converting, at said interactive device (50), the transmitted tongue plate data into said electronic stimulation signals; and
providing said electronic stimulation signals to said tongue plate (10).

ABSTRACT

A tongue plate apparatus (10) configured to lie on top of a human tongue (100). The tongue plate (10) having a lower surface configured to lie on top of a human tongue (100), the lower surface including a plurality of electronic stimulation nodes (13) operable to transmit externally generated electrical signals to stimulate sensory nerve fibers (102) within the human tongue (100) at predetermined locations. The tongue plate (10) also having an upper surface including saliva flow measurement means (55) for measuring a rate of change in the saliva flow rate of a human in response to the stimulation of the sensory nerve fibers (104). The tongue plate (10) facilitates the simulation of various taste sensations (i.e., sweet, sour, salty, bitter) in various regions of the tongue (100).

BEST AVAILABLE COPY

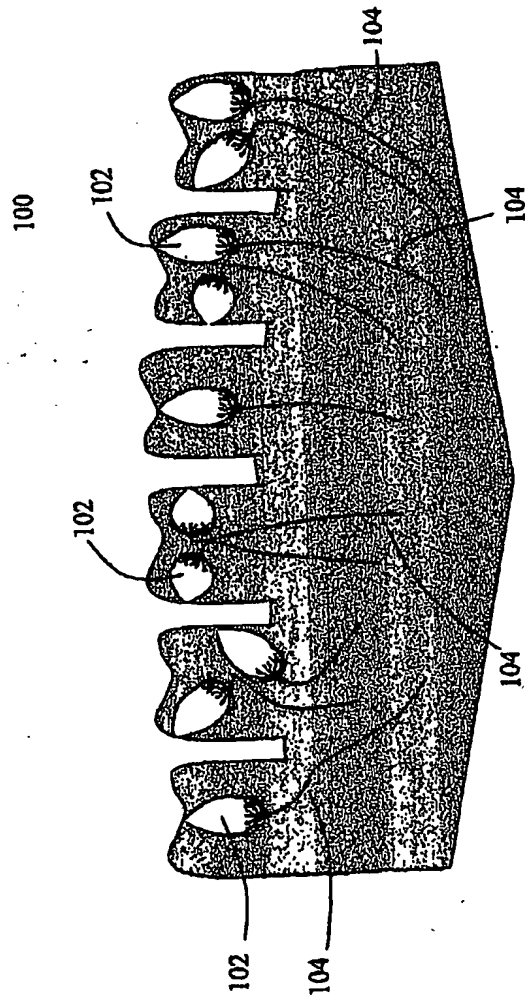


FIG. 1: (Prior art)

BEST AVAILABLE COPY

200

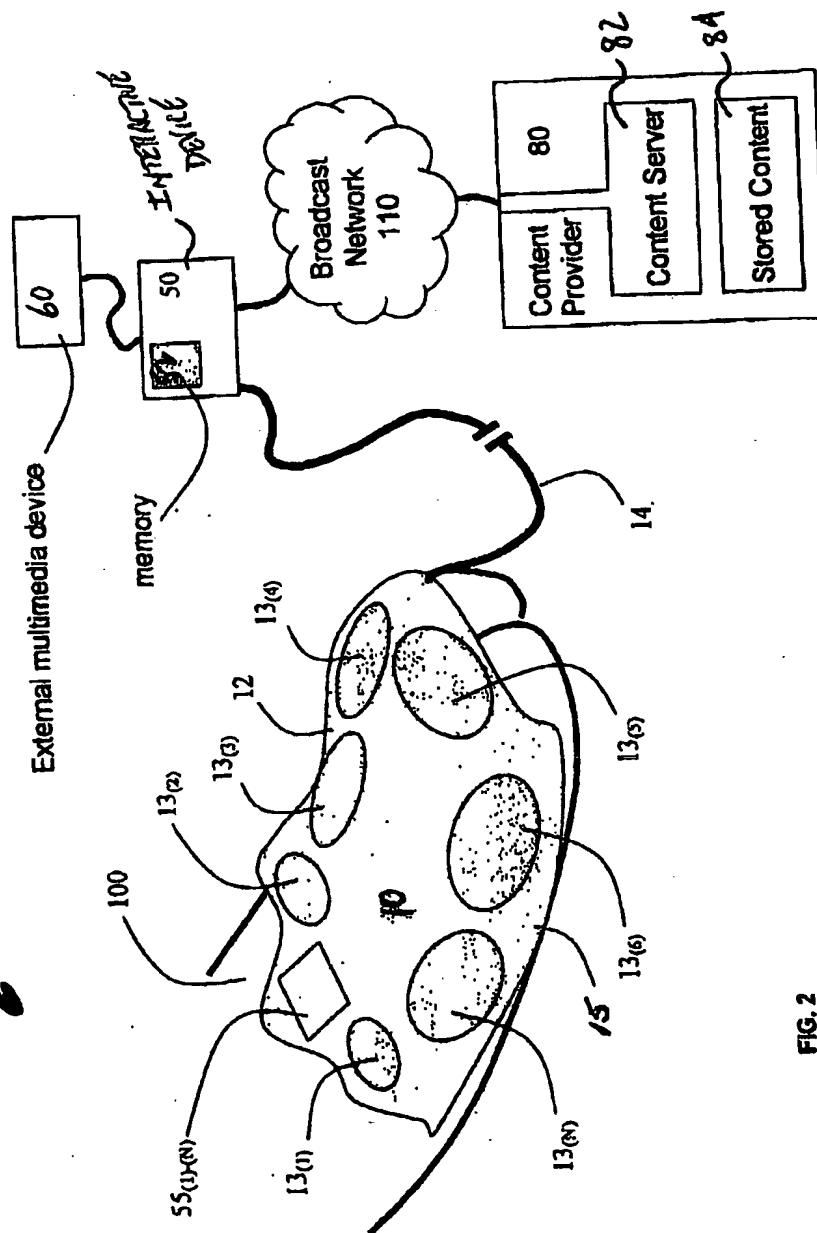


FIG. 2

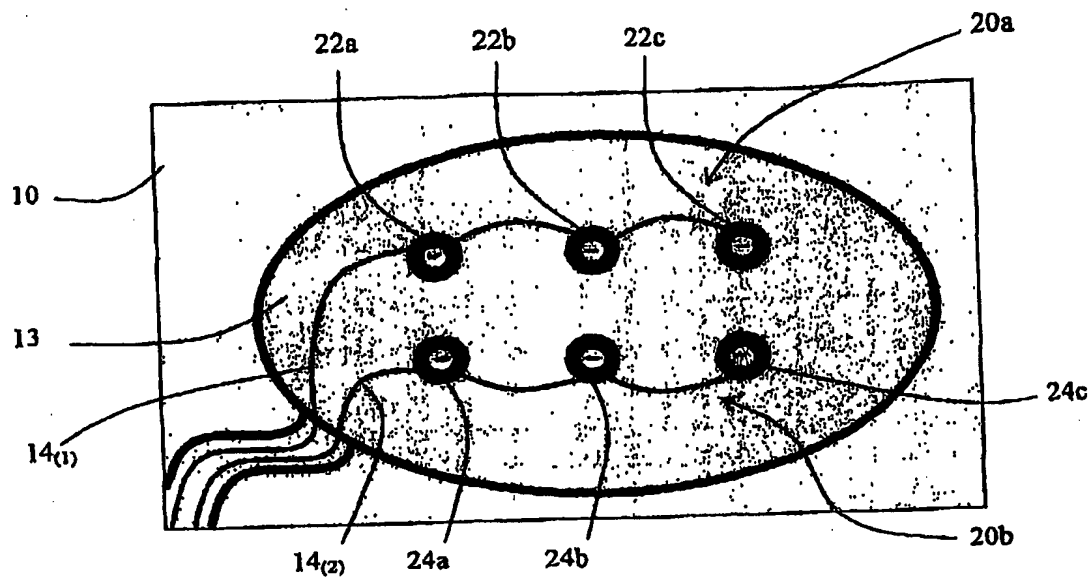


FIG. 3a

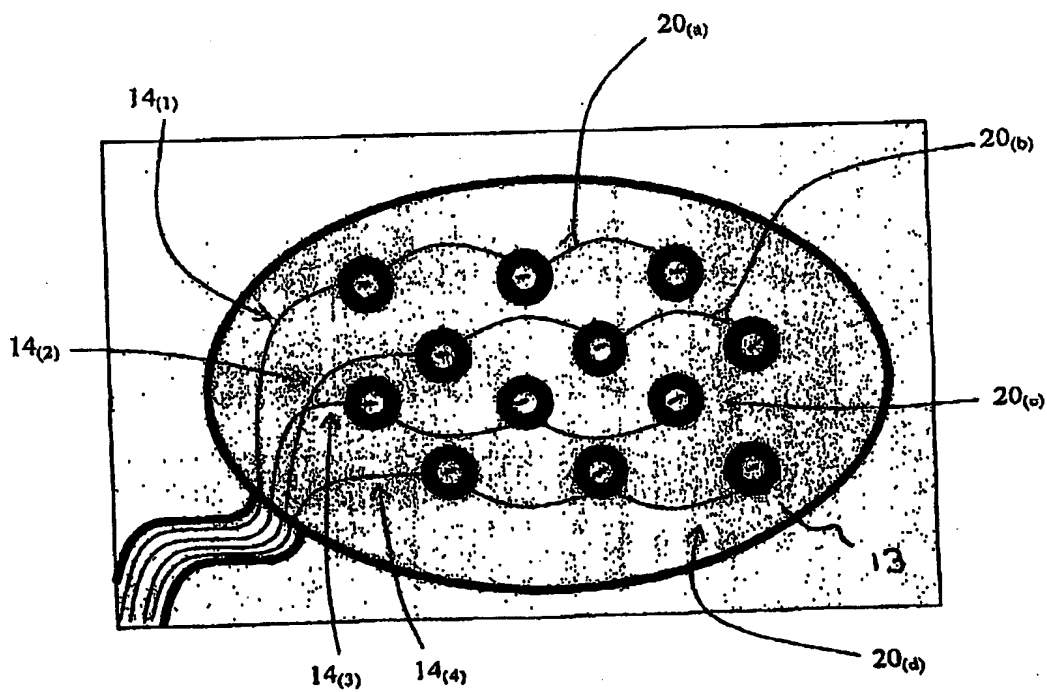


FIG. 3b

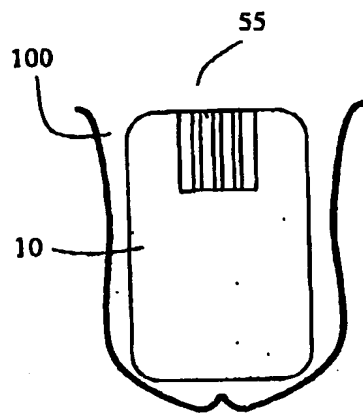


FIG. 4a

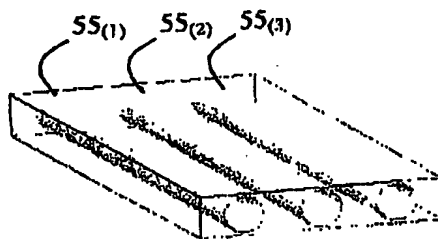


FIG. 4b

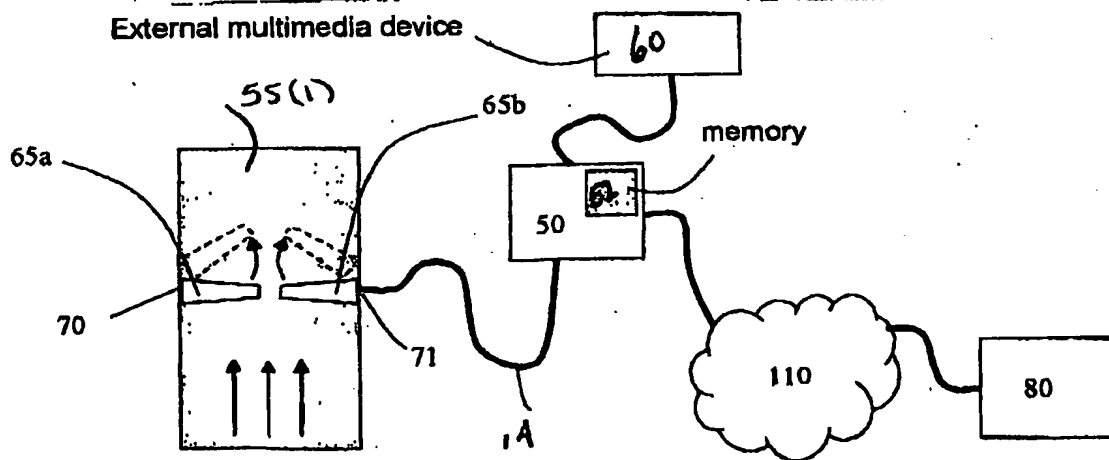


FIG. 4c

